PN – 210324

REPORT ON

GEOTECHNICAL INVESTIGATIONS

FOR THE PROPOSED

Islamia High School-cum-Inter College
At
Olhanpur, Block - Marhaura,
Dist. Saran

Your Letter No.- BSEIDC/TECH/1960/2018-1369 Dated – 02.03.2021
[Sl. No. 21]

Submitted to
The Chief Engineer
BSEIDC, Patna

March, 2021

BIHAR FOUNDATION CONSULTANTS
[A unit of Baidyanath Foundation Consultants Pvt. Ltd.]
Ganga Darshan Apartment, Flat No. 403.
Patna – 10
[e-mail : bifcon.pat@gmail.com, Phone No: + 91612 – 2272826]

Islamia High School-cum-Inter College at Olhanpur, Block - Marhaura, Dist. Saran

Bihar Foundation Consultants
403, Ganga Darshan Apartment, Patna-10
[A Unit : Baidyanath Foundation Consultants Pvt. Ltd.]

PN -210324

CONTENTS

Sl.No.	Description	Page No.
1	Introduction	1
2	Field Work	1
3	Laboratory Test	2
4	Presentation of Test Results	2
5	Soil Stratification	2
6	Foundation Analysis	2
7	Recommendations	3

Appendix

[Containing Figures and Tables]

A. Bore Holes Location Map

B. Field Test Observations & Laboratory Test Results

C. Graph of Grain size Analysis

D. Triaxial shear / Direct shear strength test curves

E. `e-log p' Curves from Consolidation Tests [Not required]

F. Sample calculation of pile

G. Copy of Work Oder

BECON

1. INTRODUCTION

The subsoil investigations reported herein were taken up (vide W.O. No. BSEIDC/Tech/1960/2018-1369 Dated – 02.03.2021 [Serial No. 21]) to find out the nature of subsoil at the site of the proposed construction and to recommend the capacity and type of its foundation. After certain tests on the soil, as detailed below, the desired recommendations have been made on **page 3** of this Report.

2. FIELD WORK

The fieldwork consisted of sinking a bore hole, conducting the necessary field tests in it and collecting soil samples from it for conducting laboratory tests on them.

2.1. Boring

Taking guidance from IS: 1892, one bore hole of 150 mm diameter was sunk at the location shown in the bore hole location map.

2.2 Sampling

2.2.1 Undisturbed Soil Samples

Open drive samplers of 100-mm diameter and about 450-mm length were used for obtaining undisturbed samples of cohesive soils. The collection, sealing, labeling and transportation of the samples to the laboratory were done as per the IS guide-lines.

2.2.2 Disturbed Soil Samples

Disturbed soil samples were collected from the bore hole at suitable intervals of depth (not more than 2.5 m) and at all depths of change in the nature of the subsoil. These samples were sealed in polythene bags with proper identification labels.

2.3 Field Tests

2.3.1 Standard Penetration Tests (SPT)

These tests were conducted as per IS: 2131 – 1963. The depth interval between two consecutive tests was 1 to 1.5 m. The tests were located in between the levels at which undisturbed soil samples were collected.

3. LABORATORY TESTS

Some or all of the following laboratory tests, as necessary, were done on the collected soil samples. Representative soil samples were selected for this from the different soil strata encountered during boring. The tests were performed as per the relevant Indian Standard Codes of Practice.

(a) Natural moisture content
(b) Bulk density
(c) Grain size analysis (using sieves and / or hydrometer)
(d) Specific gravity of soil solids
(e) Atterberg's limit tests (liquid, plastic and shrinkage limits)
(f) Shear Tests :
- [I] Triaxial compression test (unconsolidated – undrained), generally for fine- grained soils
- [II] Unconfined compression tests, only on cohesive soils
- [III] Direct shear tests, generally for coarse-grained soils

(g) Chemical tests on soil/ground water
(h) Other tests as and when required.

4. PRESENTATION OF TEST RESULTS

The field and laboratory test results are given in the **Appendix - B**.

5. SOIL STRATIFICATION

The results of field tests in three bore holes sunk at the site [vide Location Sketch in App. A] and the results of laboratory tests conducted on the collected soil samples indicate that the soil stratification at the site is as describe below.

The subsoil in all BH's is sandy clayey silt / clayey silt [type ML/MI] in various sequences and different depths up to the investigated depth of 10.5 m bgl. But in BH 3, from about 7.5 m to 10.5 m depth bgl, it is silty clay [type CI].

Ground water table was struck at about 3.20 m to 3.30 m depth below GL in March, 2021. It is subject to seasonal variations.

6. FOUNDATION ANALYSIS

The safe capacity of foundation of any type and size may be determined on the basis of the soil data given in this Report by using the standard methods of foundation design and following the relevant Indian Standard Codes.

7. RECOMMENDATIONS

The design of the foundation for the proposed structure depends on the nature of both [a] the subsoil and [b] the structure.

The subsoil in all BH's is sandy clayey silt / clayey silt [type ML/MI] in various sequences and different depths up to the investigated depth of 10.5 m bgl. But in BH 3, from about 7.5 m to 10.5 m depth bgl, it is silty clay [type CI].

Ground water table was struck at about 3.20 m to 3.30 m depth below GL in March, 2021. It is subject to seasonal variations.

In the present case,

1. The proposed structure may be provided with shallow foundation at a depth of 1.5 m or more.
2. The subsoil is mostly silt. Hence placement of bored cast in situ plane or u/r piles may not be desirable as this formation will collapse during such pile placement. Driven piles will be uneconomical.

   The values of net allowable bearing pressures of foundations of certain sizes and depths have been calculated [vide sample of Calculation in Appendix - F] and are tabulated below.

Table 1: Allowable Net Bearing Pressures [q_{na}] and Settlements Expected [s]

Depth (m) below GL	Width (m)	Net allowable bearing pressure (t/m²)			Maximum expected settlement (mm)
		Strip footing	Square footing	Raft foundation	
1.5	2.0	6.0	6.6	....	50
	3.0	6.2	6.4	....	50
	10.0	...	...	8.0	75
2.0	2.0	7.3	8.2	....	50
	3.0	7.4	7.9	....	50
	10.0	...	...	9.3	75
2.5	2.0	8.8	9.9	....	50
	3.0	8.7	9.5	....	50
	10.0	...	...	10.4	75
3.0	2.0	10.4	11.6	....	50
	3.0	10.1	11.2	....	50
	10.0	...	...	10.9	75
3.5	2.0	11.8	12.7	....	50
	3.0	11.3	11.6	....	50
	10.0	...	...	11.3	75
4.0	2.0	12.7	12.7	....	50
	3.0	11.6	11.6	....	50
	10.0	...	...	11.7	75
4.5	2.0	13.9	13.9	....	50
	3.0	12.7	12.7	....	50
	10.0	...	...	12.1	75

Note:

If a soil condition much different from those reported herein is met with during foundation trenching, suitable steps should be taken.

For Bihar Foundation Consultants,

(Prof. C.N. Sinha, Dr.-Ing., FIE)
Chief Consultant.

Islamia High School-cum-Inter College at Olhanpur, Block - Marhaura, Dist. Saran

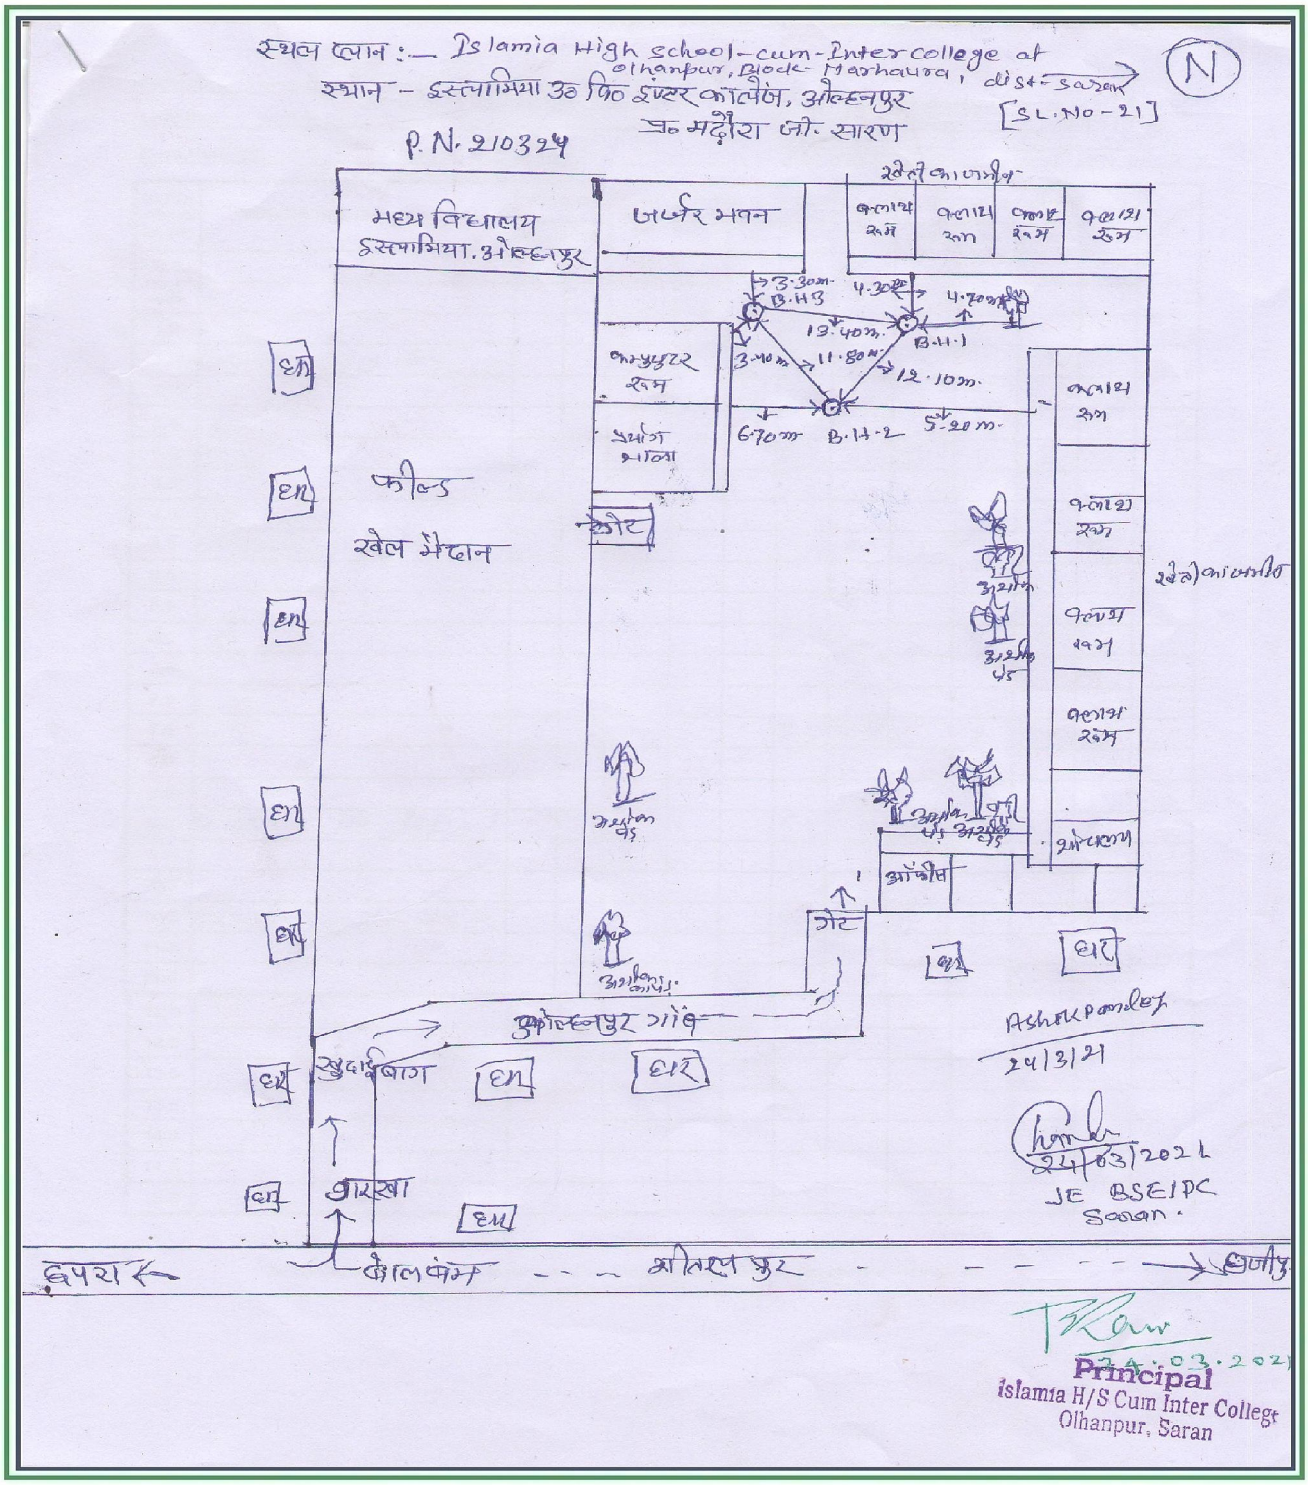

Bihar Foundation Consultants
403, Ganga Darshan Apartment, Patna-10
[A Unit : Baidyanath Foundation Consultants Pvt. Ltd.]

PN -210324 **Appendix - A**

NAME OF WORK : Sub soil Investigation for C/O							BORING FINISH DATE : 23.03.2021					WATER TABLE : 3.20 m bgl				
Islamia High School-cum-Inter College at Olhanpur, Block - Marhaura, Dist. Saran							BORING METHOD : Rotary									
BORE HOLE NO. : 1			Site Incharge - Ashok Pandey				TERMINATION DEPTH : 10.5 m					RECORD ON : 23.03.2021				

Depth Below GL (m)	Sample No.	SPT 'N' Value observation	Visual Description of Soil with IS Classification	Depth(m)		Thickness (m)	Liquid Limit	Plastic Limit	Plasticity Indix,%	Bulk Density (gm/cm3)	Natural Moisture Content (%)	Specific Gravity	Shear Test			Compression Index (C_c)
		Obsr.		from	to								Type of Test	Cohesion, c (kg/cm2)	Friction Angle, f°	
1.0			Greyish clayey silt, ML	0.0		1.5										
1.5	S1	8			1.5		31.4	27.2	4.2	1.94	28.7	2.66		0.07	15.3	
2.5			Greyish sandy clayey silt, ML	1.5		6.0										
3.0	S2	13								1.94	28.3	2.64		0.12	15.8	
4.0																
4.5	S3	15					28.8	22.5	6.3	1.94	28.2	2.64		0.13	16.0	
5.5																
6.0	S4	17								1.94	28.1	2.64		0.15	16.2	
7.0																
7.5	S5	18			7.5		38.8	27.7	11.1	1.94	28.1	2.64		0.16	16.3	
8.5			Greyish sandy clayey silt, MI	7.5		3.0										
9.0	S6	21								1.95	28.5	2.67		0.18	16.6	
10.0																
10.5	S7	23			10.5					1.95	28.4	2.67		0.21	16.8	

NAME OF WORK : Sub soil Investigation for C/O							BORING FINISH DATE : 23.03.2021					WATER TABLE : 3.30 m bgl				
Islamia High School-cum-Inter College at Olhanpur, Block - Marhaura, Dist. Saran							BORING METHOD : Rotary									
BORE HOLE NO. : 2			Site Incharge - Ashok Pandey				TERMINATION DEPTH : 10.5 m					RECORD ON : 23.03.2021				

Depth Below GL (m)	Sample No.	SPT 'N' Value observation	Visual Description of Soil with IS Classification	Depth(m)		Thickness (m)	Liquid Limit	Plastic Limit	Plasticity Indix,%	Bulk Density (gm/cm3)	Natural Moisture Content (%)	Specific Gravity	Shear Test			Compression Index (C_c)
													Type of Test	Cohesion, c (kg/cm2)	Friction Angle, f°	
		Obsr.		from	to											
1.0			Greyish clayey silt, ML	0.0		1.5										
1.5	S1	10			1.5					1.94	28.5	2.65		0.09	15.5	
2.5			Greyish sandy clayey silt, MI	1.5		6.0										
3.0	S2	14					31.4	26.6	4.8	1.94	28.2	2.64		0.13	15.9	
4.0																
4.5	S3	15								1.94	28.2	2.64		0.13	16.0	
5.5																
6.0	S4	16					35.7	28.8	6.9	1.94	28.2	2.64		0.14	16.1	
7.0																
7.5	S5	17			7.5					1.94	28.1	2.64		0.15	16.2	
8.5			Yellowish sandy clayey silt, MI	7.5		3.0										
9.0	S6	21					35.9	29.4	6.5	1.95	28.5	2.67		0.18	16.6	
10.0																
10.5	S7	24			10.5											

NAME OF WORK : Sub soil Investigation for C/O							BORING FINISH DATE : 24.03.2021					WATER TABLE : 3.20 m bgl				
Islamia High School-cum-Inter College at Olhanpur, Block - Marhaura, Dist. Saran							BORING METHOD : Rotary									
BORE HOLE NO. : 3		Site Incharge - Ashok Pandey					TERMINATION DEPTH : 10.5 m					RECORD ON : 24.03.2021				

Depth Below GL (m)	Sample No.	SPT 'N' Value observation	Visual Description of Soil with IS Classification	Depth(m)		Thickness (m)	Liquid Limit	Plastic Limit	Plasticity Indix,%	Bulk Density (gm/cm3)	Natural Moisture Content (%)	Specific Gravity	Shear Test			Compression Index (C_c)
													Type of Test	Cohesion, c (kg/cm2)	Friction Angle, f°	
		Obsr.		from	to											
1.0			Greyish clayey silt, MI	0.0		1.5										
1.5	S1	10			1.5		37.5	29.6	7.9	1.94	28.5	2.65		0.09	15.5	
2.5			Greyish sandy clayey silt, ML	1.5		3.0										
3.0	S2	13								1.94	28.3	2.64		0.12	15.8	
4.0																
4.5	S3	14					33.5	27.8	5.7	1.94	28.2	2.64		0.13	15.9	
5.5			Greyish clayey silt, ML			3.0										
6.0	S4	16								1.94	28.2	2.64		0.14	16.1	
7.0																
7.5	S5	20			7.5					1.95	28.5	2.67		0.17	16.5	
8.5			Blakish silty clay, CI	7.5		3.0										
9.0	S6	20								1.95	28.5	2.67		0.17	16.5	
10.0																
10.5	S7	27			10.5		41.5	24.8	16.7							

Table 2 [part **B]: Grain Size Analysis Results** [for Bore hole No./ Depth in m shown thus: 1/1.5]

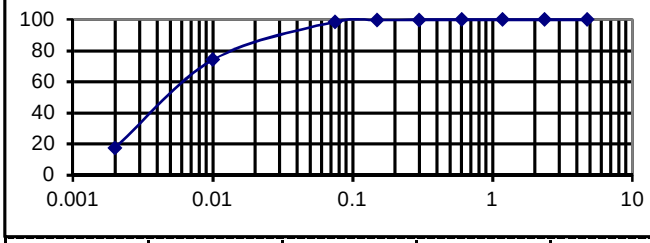

BH/depth,m	*Gravel, %*	*Sand,%*	*Silt, %*	*Clay%*
1/1.5	0.0	1.4	80.9	17.7

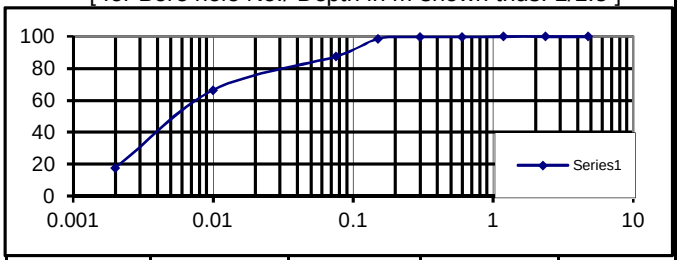

BH/depth,m	*Gravel, %*	*Sand,%*	*Silt, %*	*Clay%*
1/3.0	0.0	12.4	70.0	17.6

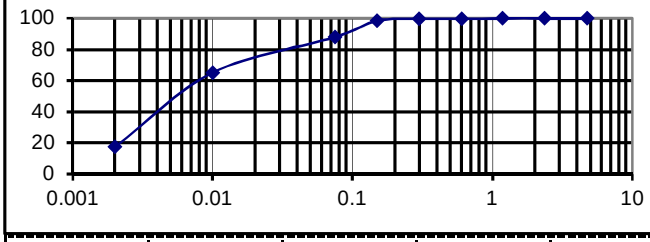

BH/depth,m	*Gravel, %*	*Sand,%*	*Silt, %*	*Clay%*
1/4.5	0.0	12.0	70.6	17.4

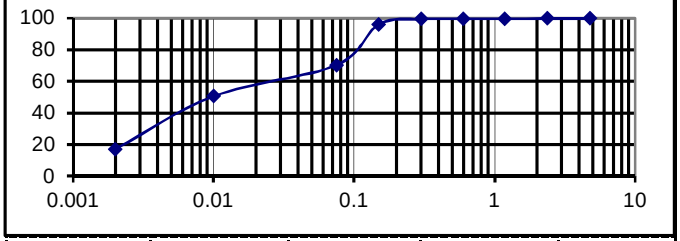

BH/depth,m	*Gravel, %*	*Sand,%*	*Silt, %*	*Clay%*
1/6.0	0.0	29.6	53.3	17.1

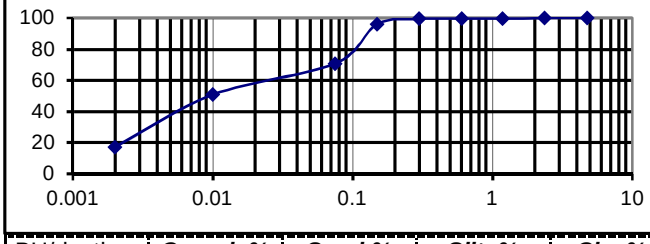

BH/depth,m	*Gravel, %*	*Sand,%*	*Silt, %*	*Clay%*
1/7.5	0.0	29.1	53.7	17.2

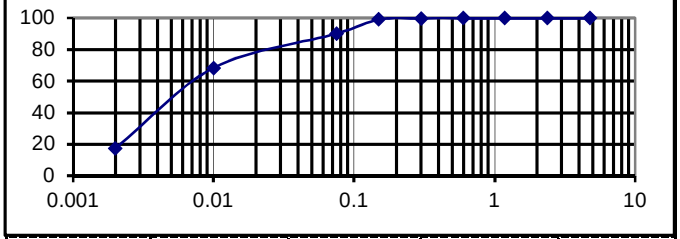

BH/depth,m	*Gravel, %*	*Sand,%*	*Silt, %*	*Clay%*
1/9.0	0.0	9.8	72.8	17.4

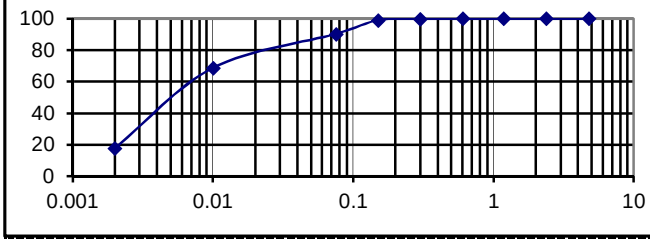

BH/depth,m	*Gravel, %*	*Sand,%*	*Silt, %*	*Clay%*
1/10.5	0.0	9.7	72.6	17.8

Table 2 [part **B**]: **Grain Size Analysis Results** [for Bore hole No./ Depth in m shown thus: 1/1.5]

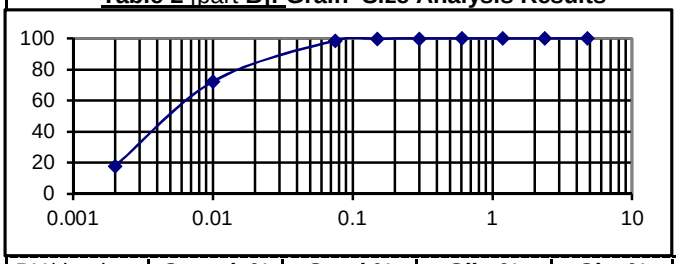

BH/depth,m	*Gravel, %*	*Sand,%*	*Silt, %*	*Clay%*
2/1.5	0.0	1.4	80.7	17.9

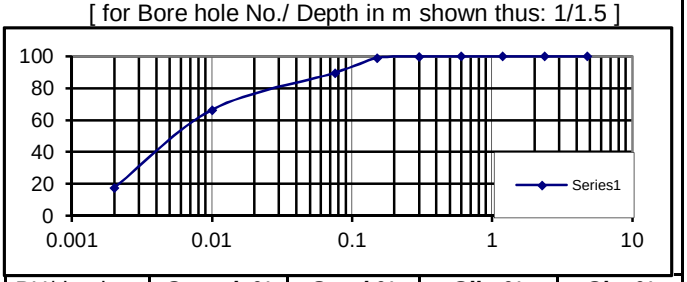

BH/depth,m	*Gravel, %*	*Sand,%*	*Silt, %*	*Clay%*
2/3.0	0.0	10.4	72.0	17.6

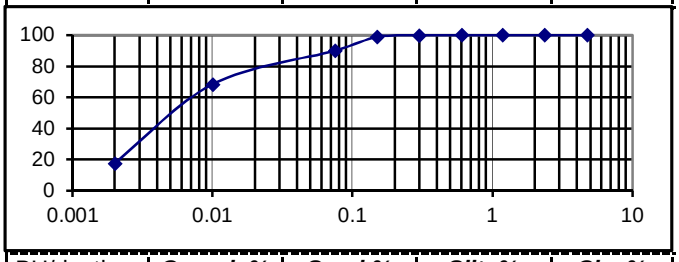

BH/depth,m	*Gravel, %*	*Sand,%*	*Silt, %*	*Clay%*
2/4.5	0.0	9.9	72.4	17.7

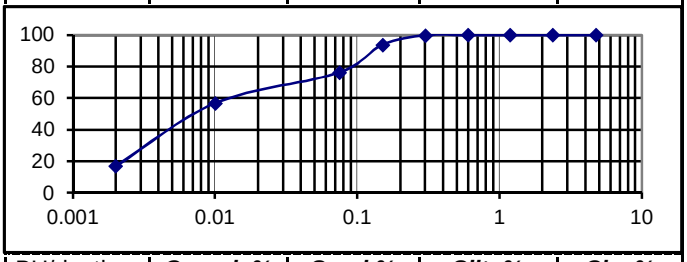

BH/depth,m	*Gravel, %*	*Sand,%*	*Silt, %*	*Clay%*
2/6.0	0.0	23.7	59.5	16.8

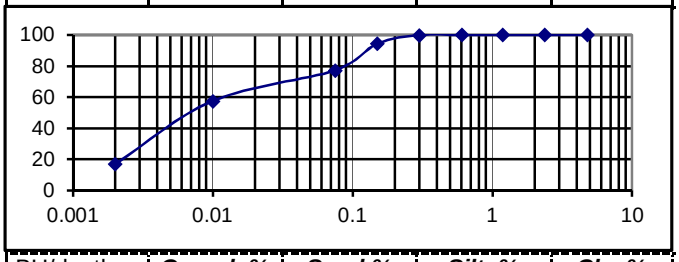

BH/depth,m	*Gravel, %*	*Sand,%*	*Silt, %*	*Clay%*
2/7.5	0.0	22.7	60.3	17.0

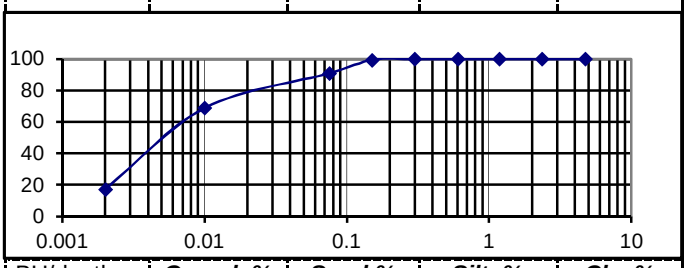

BH/depth,m	*Gravel, %*	*Sand,%*	*Silt, %*	*Clay%*
2/9.0	0.0	9.2	73.6	17.2

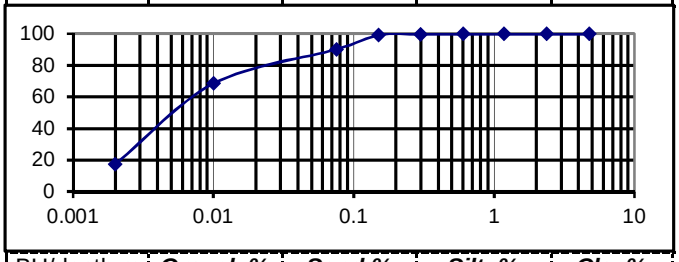

BH/depth,m	*Gravel, %*	*Sand,%*	*Silt, %*	*Clay%*
2/10.5	0.0	9.8	72.9	17.4

Table 2 [part **B]: Grain Size Analysis Results** [for Bore hole No./ Depth in m shown thus: 1/1.5]

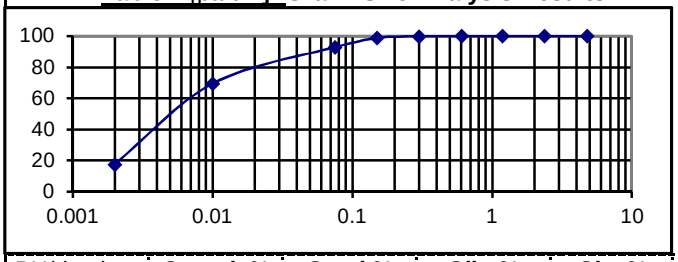

BH/depth,m	*Gravel, %*	*Sand,%*	*Silt, %*	*Clay%*
3/1.5	0.0	7.2	75.2	17.6

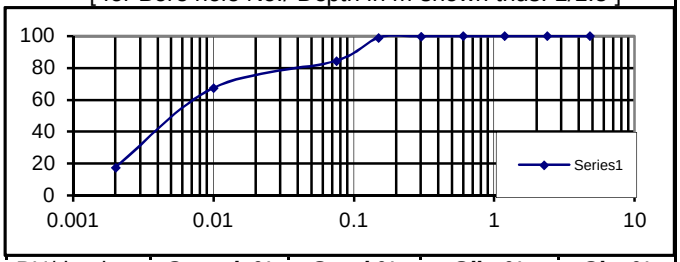

BH/depth,m	*Gravel, %*	*Sand,%*	*Silt, %*	*Clay%*
3/3.0	0.0	15.4	66.9	17.7

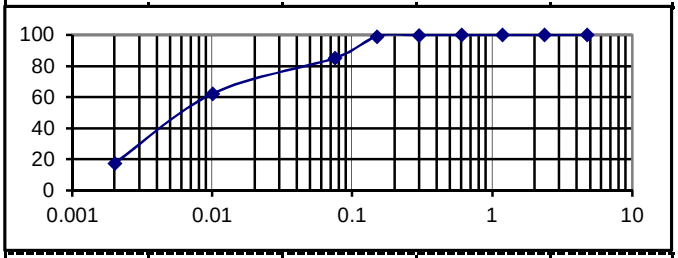

BH/depth,m	*Gravel, %*	*Sand,%*	*Silt, %*	*Clay%*
3/4.5	0.0	14.9	67.8	17.4

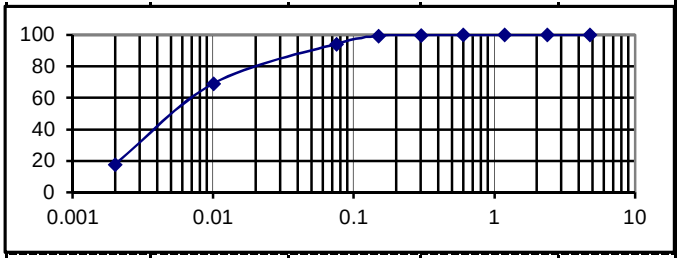

BH/depth,m	*Gravel, %*	*Sand,%*	*Silt, %*	*Clay%*
3/6.0	0.0	5.7	76.5	17.8

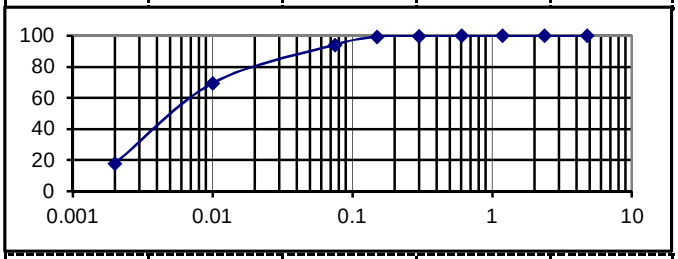

BH/depth,m	*Gravel, %*	*Sand,%*	*Silt, %*	*Clay%*
3/7.5	0.0	5.8	76.4	17.9

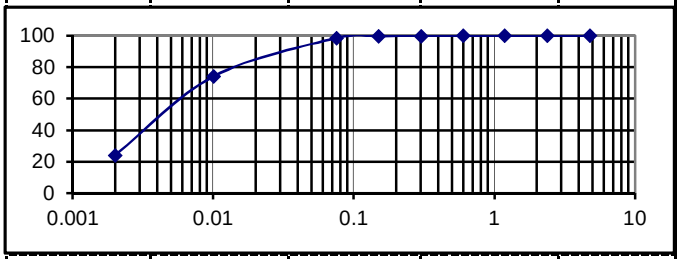

BH/depth,m	*Gravel, %*	*Sand,%*	*Silt, %*	*Clay%*
3/9.0	0.0	1.6	74.2	24.2

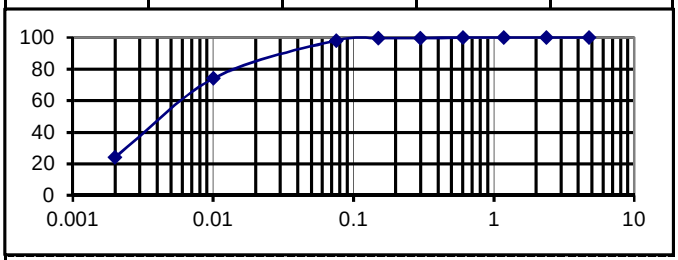

BH/depth,m	*Gravel, %*	*Sand,%*	*Silt, %*	*Clay%*
3/10.5	0.0	1.6	74.3	24.1

TRIAXIAL / DIRECT SHEAR TEST PLOTS

BH: - 1
Depth - 1.5 m
Cohesion - 0.07 Kg/cm²
Angle of Internal Friction - 15.3°

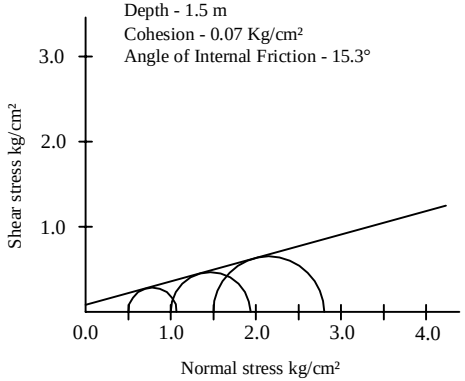

BH: - 1
Depth - 3.0 m
Cohesion - 0.12 Kg/cm²
Angle of Internal Friction - 15.8°

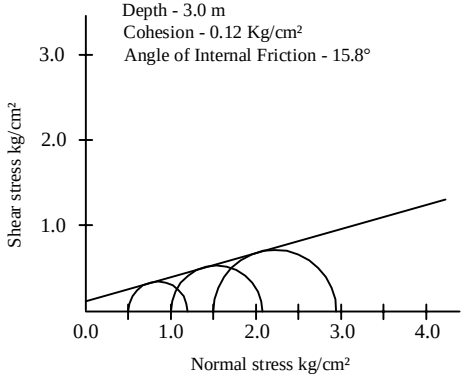

BH: - 1
Depth - 4.5 m
Cohesion - 0.13 Kg/cm²
Angle of Internal Friction - 16.0°

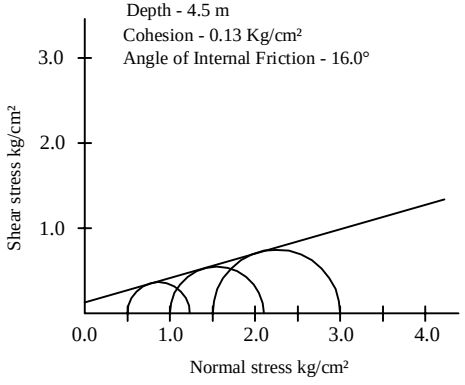

BH: - 1
Depth - 6.0 m
Cohesion - 0.15 Kg/cm²
Angle of Internal Friction - 16.2°

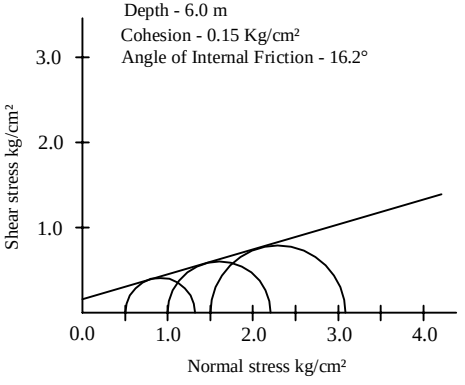

BH: - 1
Depth - 7.5 m
Cohesion - 0.16 Kg/cm²
Angle of Internal Friction - 16.3°

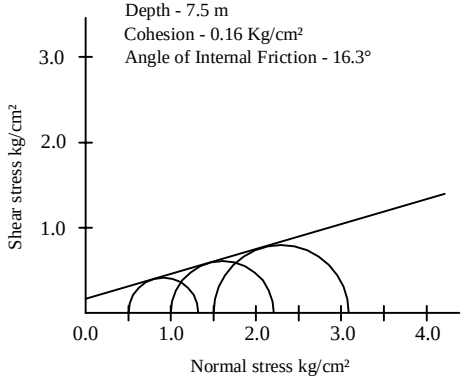

BH: - 1
Depth - 9.0 m
Cohesion - 0.18 Kg/cm²
Angle of Internal Friction - 16.6°

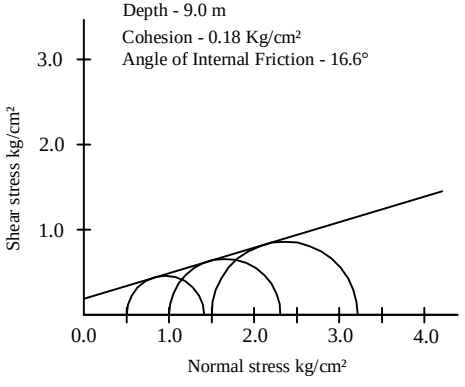

BH: - 1
Depth - 10.5 m
Cohesion - 0.21 Kg/cm²
Angle of Internal Friction - 16.8°

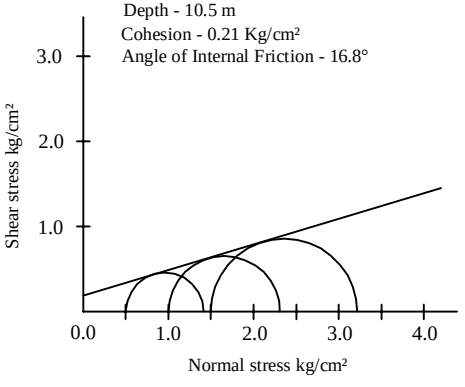

Appendix - D1

Bihar Foundation Consultants,
[A unit of Baidyanath Foundation Consultants Pvt. Ltd.]

Project No. 210324

For the Proposed

Islamia HighSchool-cum-Inter College at
Olhanpur, Block - Marhaura, Dist. Saran

TRIAXIAL / DIRECT SHEAR TEST PLOTS

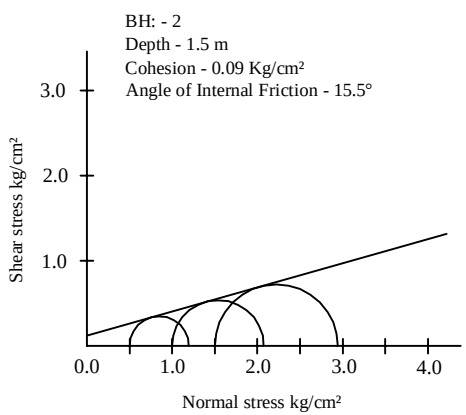

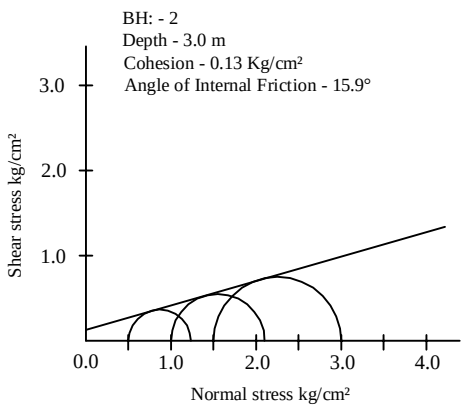

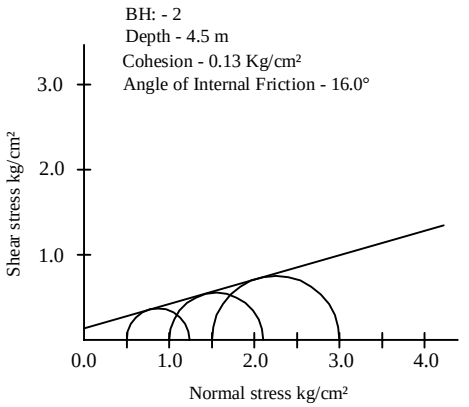

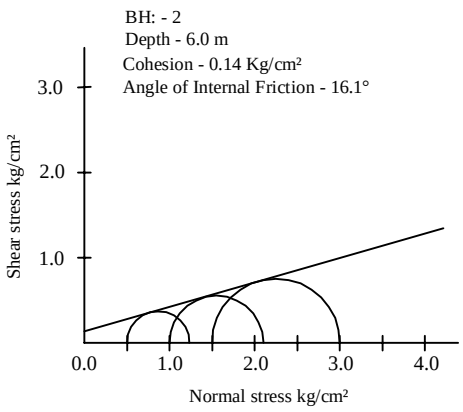

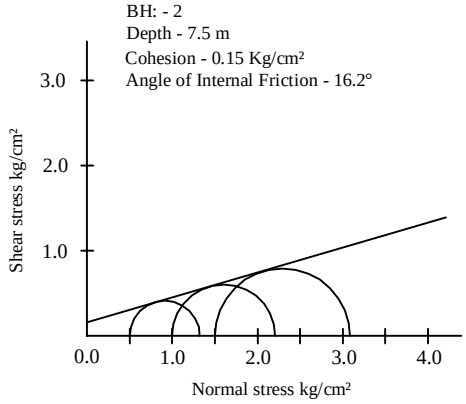

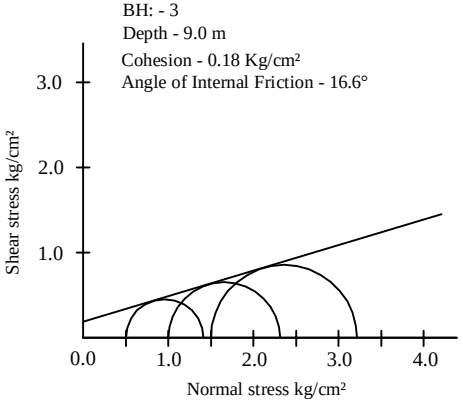

Appendix - D2

Bihar Foundation Consultants,
[A unit of Baidyanath Foundation Consultants Pvt. Ltd.]

Project No. 210324

For the Proposed

Islamia HighSchool-cum-Inter College at
Olhanpur, Block - Marhaura, Dist. Saran

TRIAXIAL / DIRECT SHEAR TEST PLOTS

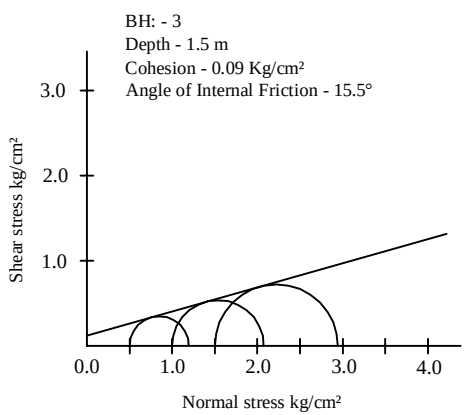

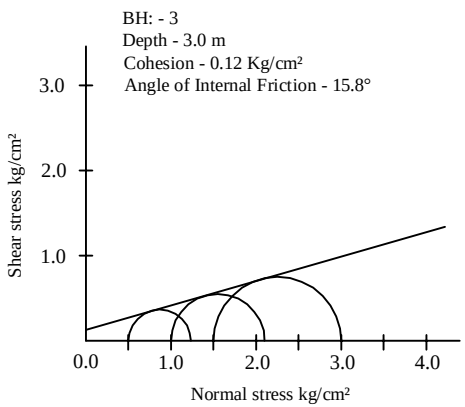

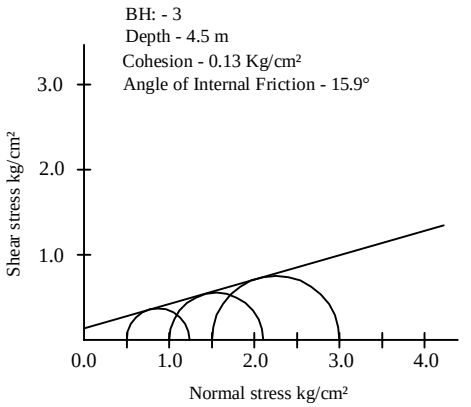

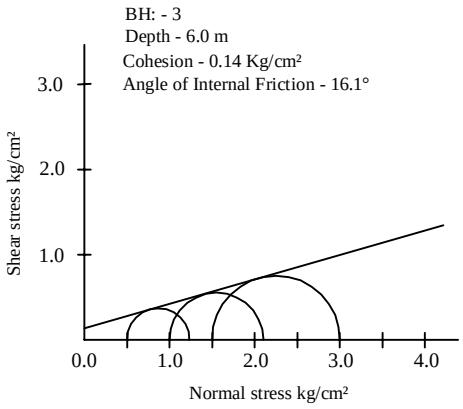

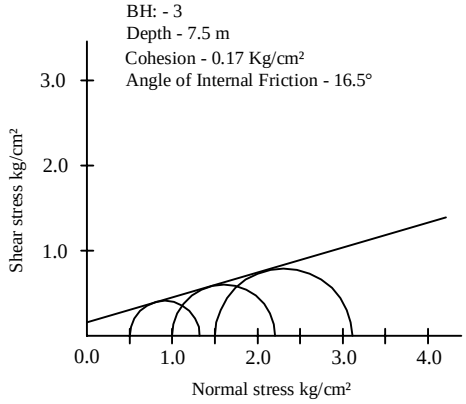

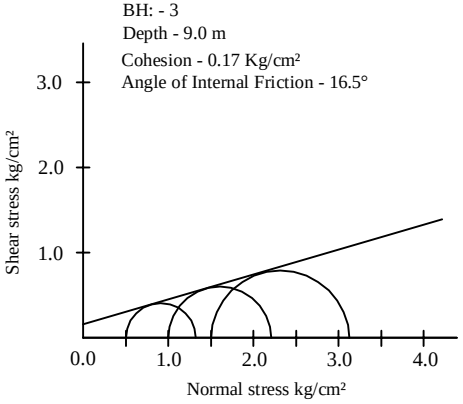

Appendix - D3

Bihar Foundation Consultants,
[A unit of Baidyanath Foundation Consultants Pvt. Ltd.]

Project No. 210324

For the Proposed

Islamia HighSchool-cum-Inter College at
Olhanpur, Block - Marhaura, Dist. Saran

SAMPLE CALCULATION OF BEARING CAPACITY OF SHALLOW FOUNDATION

The determination of the **net safe bearing capacity**, q_{ns}, is done first on the basis of the shear failure criterion after dividing the value of the **net ultimate bearing capacity** q_{nf}, calculated as described below, by a suitable factor of safety. The **net soil pressure,** q_s, for a given permissible settlement is then calculated as explained in the next section. The lower of the two values, q_{ns} and q_s, thus determined is taken as the **allowable bearing capacity** of the soil.

1. Shear Failure Criterion.The **net ultimate bearing capacity** q_{nf} (t/m^2) of a shallow foundation of breadth B (m) and depth D (m) is given as per IS:6403-1981 (Sec.5.1.2) by the following equation :

$$q_{nf} = c\,N_c\,s_c\,d_c\,I_c + q\,(N_q - 1)\,s_q\,d_q\,I_q + 0.5\,\gamma\,B\,N_\gamma\,s_\gamma\,d_\gamma\,I_\gamma\,w$$

where c = cohesion (t/m^2)
q = effective surcharge (t/m^2)
γ = unit weight of subsoil (t/m^3)
N_c, N_γ, N_q = bearing capacity factors, which are functions of ϕ, the angle of internal friction of the soil
s_c, s_q, s_γ = shape factors
d_c, d_q, d_γ = depth factors
I_c, I_q, I_γ = inclination factors
} related to cohesion, surcharge and density of subsoil respectively
w = water table factor (= 0.5 to 1.0) depending on the depth, D_w of water table- vide Table below.

The bearing capacity factors (N's) are functions of ϕ, the angle of internal friction of the soil. Their values are found for general shear failure by referring to standard tables. If subsoil conditions are such as to lead to local shear failure, the values of these factors are found for a reduced value of angle of internal friction (ϕ') given by the equation : $\tan \phi' = 0.67 \tan \phi$. The value of cohesion is also reduced to $c' = 0.67\,c$.

The values of the other factors for usual conditions are as tabulated below :

s_c =	1.3	1+0.2B/L	1	d_c =	$1+0.2\,(N_f)^{0.5}\,D/B$		D_w at	G.L.	Fou'dn.Level
s_q =	1.2	1+0.2B/L	1	$d_q = d_\gamma$ =	1	for $f < 10^o$	w =	0.5	1
s_g =	0.8//0.6	1-0.4B/L	1	$d_q = d_\gamma$ =	$1+0.1(N_f)^{0.5}\,D/B$	$f > 10^o$		Interpolation	between
FOR	sq.// O	Rect.	STRIP	I_c, I_q, I_γ = 1 for vertical load				these values	is linear.

In the present case, the representative values of cohesion © and angle of internal friction (ϕ)of the soil may be obtained from the soil data given earlier.

One example of calculation for a certain depth and width of a strip or square footing is given in the **Table A** on the next page. Full submergence of the soil has been assumed. The **safe bearing capacity**, q_{ns} has been obtained by dividing q_{nf} by a **safety factor, 3**. The net safe bearing capacity for a footing of the selected size and depth of footing is to be seen in its last column. Calculations of safe bearing capacities for other depths and widths of footings are done similarly.

2 Calculation of allowable bearing capacity based on settlement criterion

The **net soil pressure,** q_s (t/m^2) for a permissible settlement of 25 mm is give by Teng's formula:

$$q_s = 3.5\,[N'' - 3]\,\left[\,(B + 0.3)/2B\,\right]^2\; w'\; F_d \quad t/m^2$$

where N'' = corrected value of N from SPT

F_d = $[1 + D/B] <$ or = 2

D, B and w' are as defined before.

For a permissible settlement of **S** mm, the allowable bearing capacity

$$q'_s = S\,q_s\ /25$$

The corrected SPT N" values used in the calculations based on the above formula for different depths below G.L. may be found from the recorded data.

The N" value used in any case is to be for the influence zone below the footing, which depends on its width. A sample of calculation of the allowable soil pressure for the chosen size and depth of footing and for the permissible settlement is given in **Table B** in the next section.

The net allowable bearing pressure will be the lower of the values of bearing pressures found in the two Tables A and B.

Table A

Calculation of Net Safe Bearing Pressure [based on **shear failure** criterion]

Shape of Foundation: STRIP			F.S.= 3	γ, t/m³= 1.94		c = 0.75	ϕ = 15.3	Nc = 11.17	Nq = 4.06	Nγ = 2.77
D [m]	B [m]	dc	dq = dg	c	q	I Term	II Term	III Term	qnf	qnf /F
1.5	2	1.20	1.098	0.75	1.455	10.02	4.88	2.94	17.85	5.95

Table B

Calculation of Net Allowable Bearing Pressure [based on **settlement** criterion]

D	B	Fd =	N"	w'	$q_{s=25}$	S	$q_{s=s}$
m	m				t/m²	mm	t/m²
1.5	2.0	1.75	7	0.5	4.0502	50	8.1003

The adjoining Table and the comments below it are for a footing of depth, **D = 1.5 m, and width, B [m] = 2.0**

The value of allowable bearing pressure from the above Table for s = 50 mm is = 8.1 t/m²

The value of safe bearing capacity from shear criterion as found from Table A = 6.0 t/m²

Hence the allowable bearing pressure for settlement, s= or < 50 mm will be = 6.0 t/m²

The calculations for other depths and widths of footing are similar.

Islamia High School-cum-Inter College at Olhanpur, Block - Marhaura, Dist. Saran

बिहार राज्य शैक्षणिक आधारभूत संरचना विकास निगम लिमिटेड
BIHAR STATE EDUCATIONAL INFRASTRUCTURE DEVELOPMENT CORPORATION LTD.
BSEIDC
(A Govt. of Bihar Undertaking)
ISO 9001:14001; OHSAS 18001
Shiksha Bhawan, Bihar Rashtrabhasha Parishad Campus, Acharya Shivpujan Sahay Path, Saidpur, Patna - 800 004
Tel. No. : 0612 - 2660850 • Fax No. : 0612 - 2660256
E-mail : bseidc@gmail.com • Website : http://www.bseidc.in • CIN : U80301BR2010SGC015859

पत्रांकः— BSEIDC / TECH / 1960 / 2018 — 1369 दिनांक 02.03.2024

प्रेषक,

मुख्य अभियंता
BSEIDC Ltd, Patna

सेवा में,

बिहार फाउंडेशन कंसल्टेन्ट
गंगा दर्शन अपार्टमेंट, फ्लैट नं०—403
सदाकत आश्रम के पश्चिम,
पटना— 800010

विषयः— **निर्माण स्थल के मिट्टी जाँच हेतु।**

प्रसंगः— भवन निर्माण विभाग का पत्र संख्या—2030, दिनांक—21.04.2006

महाशय,

बिहार राज्य शैक्षणिक आधारभूत संरचना विकास निगम लि० के अधीन **"जहानाबाद, अरवल, नवादा, रोहतास, कैमुर, मुंगेर, सुपौल, वैशाली, सारण, भागलपुर और दरभंगा "** में विभिन्न +2 स्तरीय विद्यालय भवनों का निर्माण कार्य प्रस्तावित है। इन भवनों के निर्माण स्थलों पर मिट्टी की जाँच कराना है, जिसकी सूची (कम सं0—1 से 23 एवं 25 से 26 कुल 25)संलग्न है।

अतः अनुरोध है कि उपरोक्त स्थलों का तीन—तीन बिन्दुओं पर 10.5 मीटर गहराई तक प्रत्येक 1.5 मीटर गहराई में मिट्टी का नमूना संग्रह कर प्रतिवेदन समर्पित करें। साथ ही विहित प्रपत्र में मिट्टी के भार वहन क्षमता की गणना (Isolated एवं Pile Foundation के लिए अलग—अलग) भी Hard Copy एवं Soft Copy में समर्पित करें।

इस जाँच कार्य को इस तरह संपादित करें कि ट्रान्सपोर्टेशन एवं मोबलाईजेशन खर्च कम से कम हो। कार्य स्थलों पर सम्पर्क व्यक्ति, कार्य से संबंधित प्राचार्य / संबंधित कार्यपालक अभियंता रहेंगे।

विश्वासभाजन

13/3/24

मुख्य अभियंता

Islamia High School-cum-Inter College at Olhanpur, Block - Marhaura, Dist. Saran

262

Bihar State Educational Infrastrucure Development Corporation Ltd.

List of Schools for Soil Test

Sl.No.	District	Block	Name of Vidyalay	Letter no. & Date of A/A	Name & Mobile no of Executive Engineer
1	Jehanabad	Ratni Faridpur	High School, Rakasiya Dyaichak	11/भवन 08-02/2018-176 dt. 26.02.2020	Sri Binod Ranjan, 9661863636
2	Arwal	Kurtha	Govt. High School, Kurtha		Sri Binod Ranjan, 9661863636
3	Nawada	Hisua	High School, Pacharha		Sri Binod Ranjan, 9661863636
4	Rohtas	Chenari	Gangotri Project High School, Chenari	11/वि.-11-48/2018 - 207 dt. 18.03.2020	Sri Ranvijay Kumar Sinha, 9934961293
5	Kaimur	Durgawati	High School, Dhanechha	11/भवन 08-01/2017-217 dt. 20.03.2020	Sri Ranvijay Kumar Sinha, 9934961293
6	Kaimur	Durgawati	Shatruharan High School, Kalyanpur		Sri Ranvijay Kumar Sinha, 9934961293
7	Kaimur	Ramgarh	High School, Ramgarh		Sri Ranvijay Kumar Sinha, 9934961293
8	Kaimur	Ramgarh	High School Rajendranagar, Deohaliya		Sri Ranvijay Kumar Sinha, 9934961293
9	Kaimur	Nuaon	Ramayan singh High School, Banka Bahuaara		Sri Ranvijay Kumar Sinha, 9934961293
10	Kaimur	Nuaon	Sarvodya High School, Guriyan		Sri Ranvijay Kumar Sinha, 9934961293
11	Supaul	Chhatapur	Govt. Lalit Narayan Vidya Mandir, Balua Bazar		Sri Satish Prasad, 9523226037
12	Munger	Dharhara	Bapu Peaveshika High School, Sundarpur	11/वि.-11-05/2019 - 219 dt. 20.03.2020 and 11/वि.-11-05/2019 -118 dt. 18.02.2021	Sri Surendra Kumar, 7903912972
13	Munger	Khargpur	Gandhi Memorial High School, Muzaffarganj		Sri Surendra Kumar, 7903912972
14	Munger	Khargpur	Inter High School, Lohachi		Sri Surendra Kumar, 7903912972
15	Munger	Jamalpur	Sardar Patel High School, Hanspuri		Sri Surendra Kumar, 7903912972

Islamia High School-cum-Inter College at Olhanpur, Block - Marhaura, Dist. Saran

Sl.No.	District	Block	Name of Vidyalay	Letter no. & Date of A/A	Name & Mobile no of Executive Engineer
16	Vaishali	Jandaha	Raghunandan Singh Ishwariy High School, Narharpur Mukunpur	11/भवन 08-01/2019-49 dt. 15.09.2020	Sri Rajeev Ranjan, 9234271071
17	Vaishali	Jandaha	High School, Panapur Bateshwarnath		Sri Rajeev Ranjan, 9234271071
18	Vaishali	Mahnar	High School, Basudevpur Chandel		Sri Rajeev Ranjan, 9234271071
19	Vaishali	Mahnar	High School, Balak		Sri Rajeev Ranjan, 9234271071
20	Vaishali	Mahnar	High School, Gorigama		Sri Rajeev Ranjan, 9234271071
21	Saran	Marhaura	Islamia High School - cum - Inter College, Olhanpur	11/विविध 11-05/2019-50 dt. 15.09.2020	Sri Anil Kumar, 9543014772
22	Jehanabad	Ghoshi	High School, Bairamsarai	11/भवन 08-01/2018 अंश-क - 53 dt. 21.09.2020	Sri Binod Ranjan, 9661863636
23	Bhagalpur	Narayanpur	L.N.M. +2 Balika High School, Bhramarpur	11/भवन 08-01/2020 - 56 dt. 23.09.2020	Sri Sanjeev Kumar, 9122680145
24	Patna	Phulwari Sharif	Upgraded Uchch Maadhyamik vidyalay, Gannipur, Sakraicha	11/यो 11-01/2019-55 dt. 22.09.2020	Sri Sunil Kr. Sinha, 8544126916
25	Darbhanga	Hanuman Nagar	(+2) Devnarayan High School, Panchobh	11/भवन 08-01/2018-57 dt. 23.09.2020	Sri Anil Kr. Singh, 9801494702
26	Darbhanga	Darbhanga	(+2) Onkar High School, Supaul Bazar	11/वि.-11-01/2020 - 86 dt. 09.12.2020	Sri Anil Kr. Singh, 9801494702

Shailendra 01/03/2021
Junior Engineer

Assistant Engineer

01.03.2021
Executive Engineer